


AIR MONTANA 20

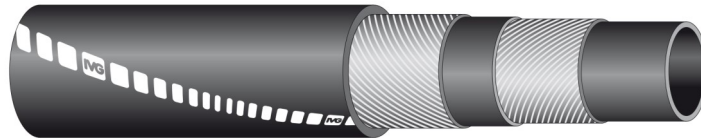

Compressed air hose

Application: softwall hose for compressed air with light traces of oil mist, normally used for heavy duty applications in road construction sites, quarries and mines.

Temperature: from -30°C (-22°F) to +70°C (+158°F).

Construction

Tube: black, smooth, SBR rubber, oil mist resistant.

Reinforcement: high strength synthetic cord.

Cover: black, smooth, (wrapped finish) long lasting EPDM rubber, weathering and ozone resistant.

Branding: continuous blue brand "IVG Air (Family Logo)...".

Also available upon request: 1. Different diameters 2. Cover in different colours 3. Different working pressures.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1447432	6	17/72	14	0,55	20	300	60	900	0,16	0,11	60	2,4	100	328
1447440	7	8/29	16	0,63	20	300	60	900	0,22	0,15	60	2,4	100	328
1447459	8	5/16	17	0,67	20	300	60	900	0,22	0,15	65	2,6	100	328
1447467	10	25/64	19	0,75	20	300	60	900	0,26	0,17	80	3,2	100	328
1447475	13	1/2	23	0,91	20	300	60	900	0,36	0,24	105	4,1	60	200
1447483	16	5/8	26	1,02	20	300	60	900	0,42	0,28	130	5,1	60	200
1447491	19	3/4	30	1,18	20	300	60	900	0,54	0,36	150	5,9	60	200
1447505	25	1	37	1,46	20	300	60	900	0,74	0,50	200	7,9	40	131