


## HOT EASYCLEAN

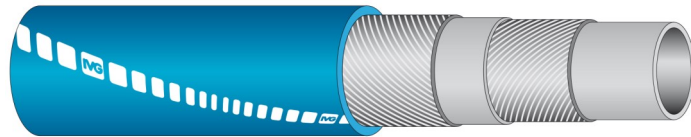

## Extruded hot water washing hose

**Standards:** Phthalates free. FDA tit.21 art. 177.2600 aqueous and fatty foods. BfR XXI Cat.3. Cover: according to ISO 22196:2011 (Ref.1).

**Application:** hot water washing hose in food environment with excellent resistance to high temperatures. Suitable for hygienic operations in dairies, canneries, slaughterhouses and all food processing industries. Particularly fat resistant cover.

**Temperature:** from -20°C (-4°F) to +95°C (203°F).

### Construction

**Tube:** white, seamless synthetic rubber, food quality, fat resistant.

**Reinforcement:** high, strength synthetic fabrics.

**Cover:** antimicrobial, blue, seamless synthetic rubber, ageing, ozone and fat resistant.

**Branding:** IVG EASYCLEAN - (FDA, BfR cat.3) - W.P. 10 BAR - SIZE - 95°C - BATCH NUMBER.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1466267	13	1/2	21,5	0,85	10	150	30	450	0,32	0,21	80	3,2	60	200
1466275	16	5/8	25	0,99	10	150	30	450	0,41	0,27	95	3,7	60	200
1466283	19	3/4	28,5	1,12	10	150	30	450	0,50	0,33	115	4,5	50	164
1466291	25	1	35	1,38	10	150	30	450	0,66	0,45	155	6,1	40	131