




HOT MULTIFORM BLACK 10

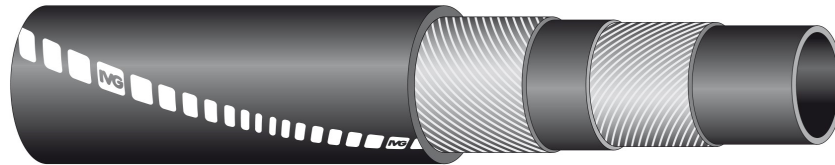

Extruded hose for hot water and non aggressive fluids

Application: designed to convey hot water, fluids even slightly acidic and non aggressive in chemical industries.

Temperature: from -40°C (-40°F) to +120°C (+248°F).

Construction

Tube: black, seamless EPDM rubber compound.

Reinforcement: high strength synthetic fabrics.

Cover: black, seamless, ageing, ozone, weathering-resistant, EPDM rubber compound.

Branding: IVG RUBBER HOSE MULTIFORM BLACK 10 BAR W.P.
TEMP. 120°C (+248°F) SIZE - BATCH NUMBER.

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1447521	5	11/61	10,5	0,41	10	150	30	450	0,08	0,05	30	1,2	100	328
1447530	8	5/16	15	0,59	10	150	30	450	0,15	0,10	50	2,0	100	328
1447548	10	25/64	17	0,67	10	150	30	450	0,17	0,11	60	2,4	100	328
1447840	12	15/32	19	0,75	10	150	30	450	0,21	0,14	70	2,8	100	328
1447564	13	1/2	19	0,75	10	150	30	450	0,18	0,12	80	3,2	100	328
1447572	15	19/32	23	0,91	10	150	30	450	0,28	0,19	90	3,5	60	200
1447580	16	5/8	23	0,91	10	150	30	450	0,25	0,17	100	3,9	60	200
1447661	19	3/4	26	1,02	10	150	30	450	0,31	0,21	110	4,3	60	200