

SANISTREET FLEX >



60 l/min at 7.5 bar

Admixing rate
0.5% / 1% / 3.5%



The AWG SANISTREET FLEX is **the optimum tool** to transform your fire engine into a multitool with its plug & play system **for mixing and spraying cleaning solutions** from the fire pump connected to the water tank >



TRANSFORM YOUR FIRE ENGINE INTO A MULTITOO!



A Unit of IDEX Corporation





- Protects your fire pump from risk of corrosions
- Efficient cleaning with 60 l/min at 7.5 bar
- Throw distance approx. 8-10 m and spray angle of 25°
- Suitable for use with water and liquid cleaning agents *
- Retrofit system
- Compact solution for an easy storage
- Storz, BI & NH hard anodized couplings

➤ In some areas, cleaning and disinfecting public spaces became an important part of keeping the population safe. Whilst primarily designed for fire fighting Godiva and AWG worked together to look at how to transform fire engines into a tool that could be used for applying disinfectant.

The AWG SANISTREET FLEX technology eliminates the risk of getting any cleaning agent into the pump. This insures that your fire pump will not be affected by any additives, maintaining the performance and reliability of your equipment.

The SANISTREET FLEX offers versatility to your fire pump. Not only can your fire engine be used for fire-fighting, but simply by connecting the SANISTREET FLEX to your delivery valve, you also have a cleaning solution dispenser. This set is optimised for cleaning public surfaces. It can also be used for cleaning equipment on site after the fire call and, avoiding having to take your contaminated equipment all the way to the fire station to be cleaned.

The eductor provided offers 3 mixing rates for more flexibility, depending on the cleaning solution selected and its mixing recommendations: 0.5 %, 1 % & 3.5 % mixing*.

From only 1.1 kg, the nozzle is very lightweight and nonetheless robust allowing a high degree of mobility for a thorough clean with a high-quality flat jet spray. The pistol grip gives an excellent handling. The low-pressure water jet also offers the possibility of cleaning sensitive surfaces. **This could be used in conjunction with the Vetter decontamination equipment.**

Depending on your couplings system, we provide the AWG SANISTREET FLEX of hard-anodised adaptors in Storz, Instantaneous and NH systems.

Technical Data

INLET / OUTLET: STORZ

Inlet Eductor	Outlet Eductor	Inlet Nozzle	Eductor LxWxH [mm]	Nozzle LxWxH [mm]	Weight [kg]	AWG Id No.
75 B	25 D	25 D	190x126x152	367x55x162	2.1	208 085 33
75 B	52 C	52 C	207x126x152	368x98x184	2.7	208 082 33

INLET / OUTLET: BI


2½"m	2½"f	2½"m	238x88x139	385x80x175	3.1	208 083 33
------	------	------	------------	------------	-----	------------

INLET / OUTLET: NH

1½"f	1½"m	1½"f	196x73x126	382x73x171	2.4	208 084 33
------	------	------	------------	------------	-----	------------

Please read instructions provided with the kit. Failure to follow all instructions provided with the AWG SANISTREET FLEX, the cleaning agent being used, and the AHJ (Authority Having Jurisdiction), may result in serious personal injury.

*Please note to always follow the cleaning agent manufacturer recommendations.

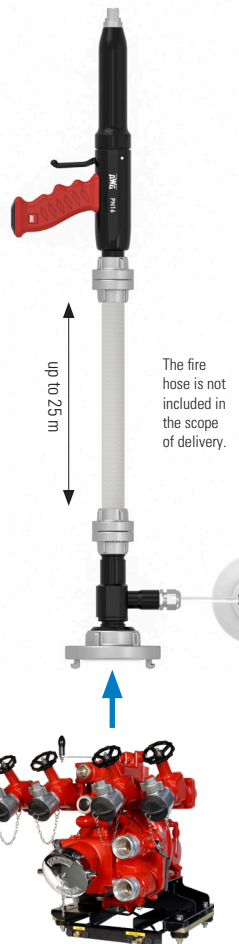

AWG SANISTREET FLEX can be used with any pump that provides 60 l/min at 7.5 bar.